



MASON INDUSTRIES, Inc.

Manufacturers of Vibration Control Products

NY Mailing Address: PO Box 410, Smithtown, NY 11787

350 Rabro Drive 2101 W. Crescent Ave., Suite D
Hauppauge, NY 11788 Anaheim, CA 92801
631/348-0282 714/535-2727
FAX 631/348-0279 FAX 714/535-5738

Info@Mason-Ind.com Info@MasonAnaheim.com


CERTIFIED FOR

JOB NAME :
CUSTOMER :
CUSTOMER P.O. :
MASON M.I. :
DWG. NO. :

TYPE

MAS

ROLLING LOBE
AIR SPRINGS

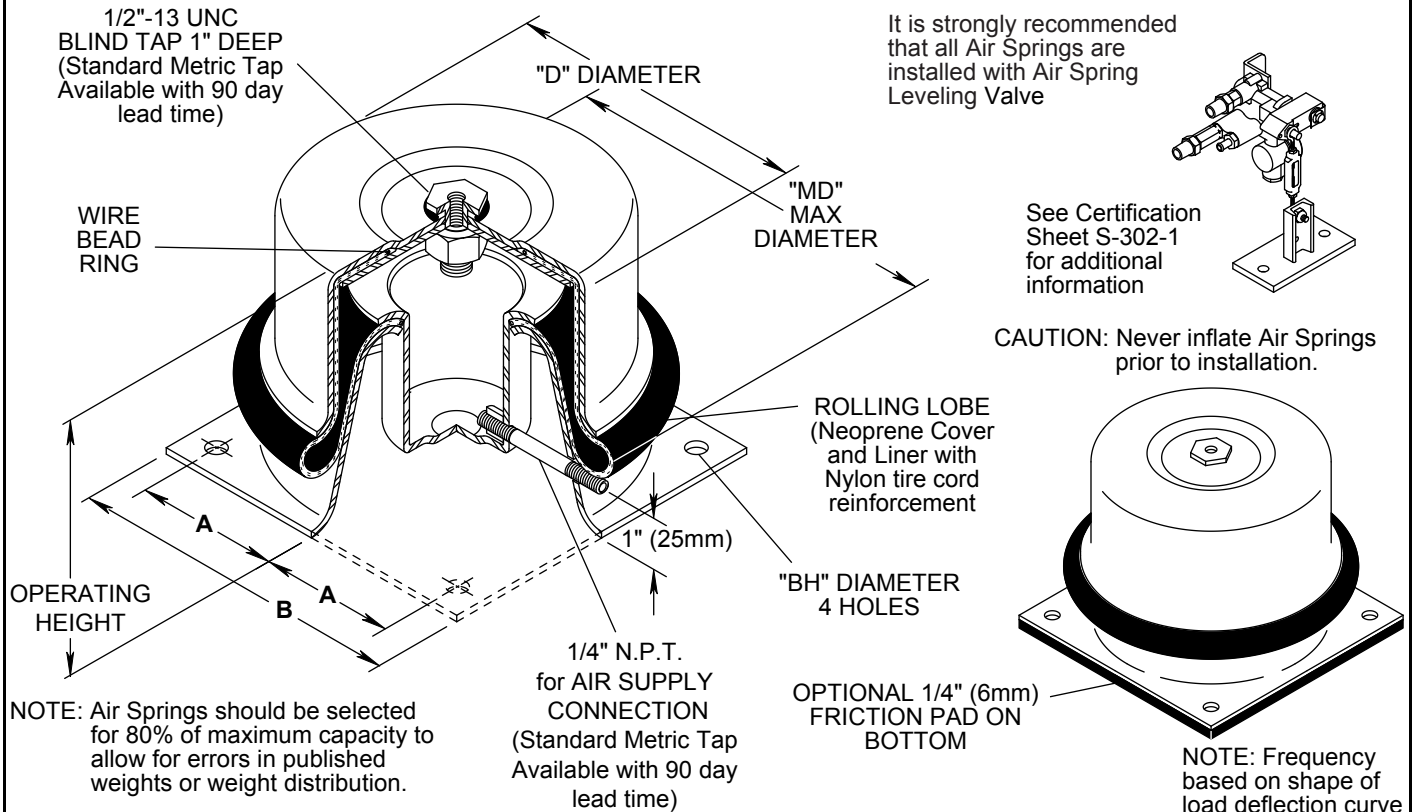

TYPE MAS DIMENSIONS (inches)

Size	Operating Height (in)	A	B	D	BH	MD
MAS-3000	8 1/4	2 1/2	6 1/8	6	11/32	7 1/4
MAS-6800	8 1/4	3 5/8	8 5/8	9	11/32	10 1/2
MAS-12000	8 1/4	4 3/4	11 1/2	12	15/32	14

TYPE MAS RATINGS

Size	Min Load @ 10 psi (lbs)	Max Recommended Load @ 80 psi (lbs)	Max Load @ 100 psi (lbs)	Approximate Frequency CPM Hertz
MAS-3000	300	2400	3000	84 1.4
MAS-6800	680	5440	6800	84 1.4
MAS-12000	1200	9600	12000	78 1.4

TYPE MAS DIMENSIONS (metric)

Size	Operating Height (in)	A	B	D	BH	MD
MAS-3000	209	64	156	150	9	184
MAS-6800	209	92	219	230	9	267
MAS-12000	209	121	292	300	12	350

TYPE MAS METRIC RATINGS

Size	Min Load @ 0.7 kg/cm ²	Max recommended Load @ 5.6 kg/cm ²	Max Load @ 7 kg/cm ²	Approximate Frequency CPM Hertz
MAS-3000	136	1088	1360	84 1.4
MAS-6800	309	2472	3090	84 1.4
MAS-12000	545	4360	5455	78 1.4

CERTIFICATION DATA

NOTE: Some equipment requires supplementary steel between the unit and the isolators. Check equipment manufacturers' recommendations.

DWN : CHKD: DATE :

DWG NO. :