



**MERCER
RUBBER Co.**


Info @ Mercer-Rubber.com

350 Rabro Drive
Hauppauge, NY 11788
Tel 631-582-1524
FAX 631-348-0279

JOB NAME	_____
CUSTOMER	_____
CUSTOMER P.O.	_____
MERCER NO.	_____
DATE: 12/16/25	DWG NO: RCL-251216-2

MI-9.2 DOUBLE ARCH DUCT CONNECTOR

NOTE: USED IN AIR SERVICE ONLY

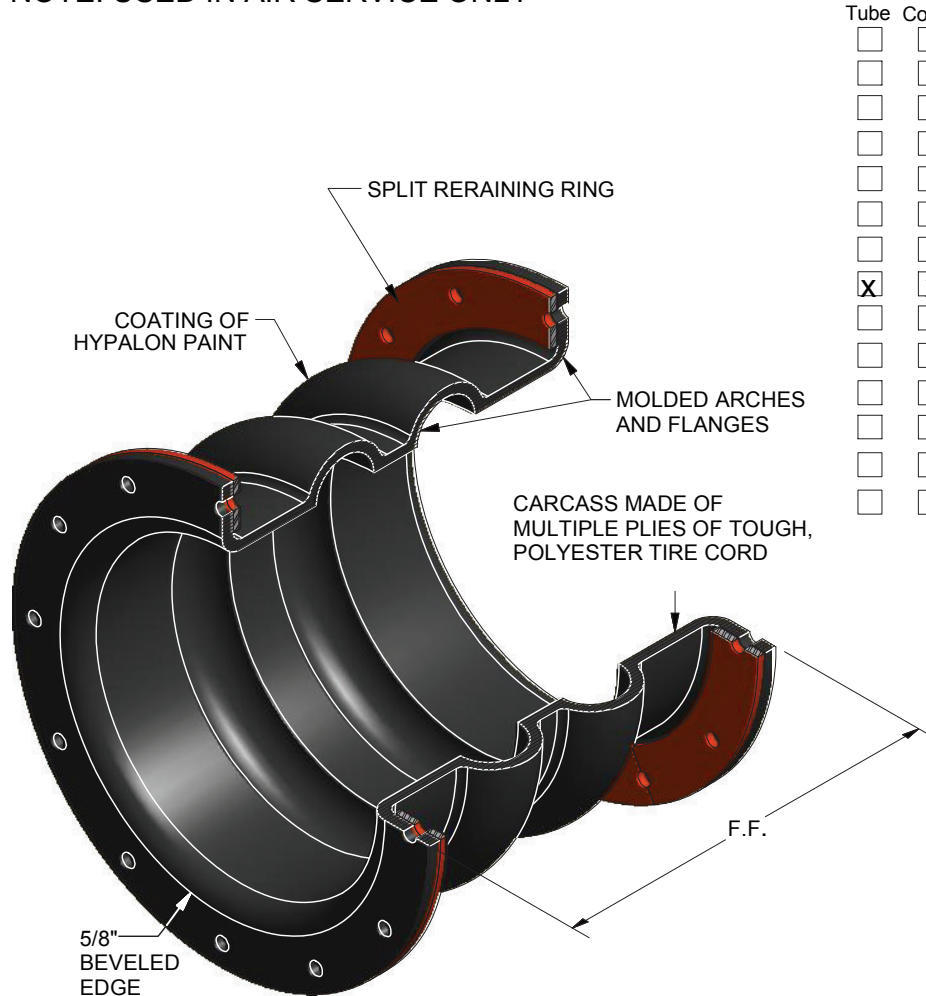

Tube	Cover		Temperature Rating
☐	☐	Natural Rubber	180°F
☐	☐	Pure Gum	180°F
☐	☐	Chlorobutyl	250°F
☐	☐	Neoprene	225°F
☐	☐	Food Grade Neoprene (☐ White ☐ Black)	225°F
☐	☐	Food Grade EPDM (☐ White ☐ Black)	250°F
☐	☐	Self Extinguishing Neoprene	225°F
☒	☒	Hypalon	225°F
☐	☐	Nitrile (Buna N)	210°F
☐	☐	EPDM	250°F
☐	☐	Viton	250°F
☐	☐	EPDM w/Kevlar	350°F
☐	☐	Viton w/Kevlar	400°F
☐	☐	Silicone w / Fiberglass	500°F

SPLIT RETAINING RINGS
☐ STEEL ☒ STAINLESS STEEL 316
☐ GALVANIZED
THICKNESS 1/2"

STYLE MI-9.2 DIMENSIONS, ALLOWABLE MOVEMENTS and OPERATING PRESSURES

QUANTITY	DUCT SIZE (in)	FACE TO FACE F.F. (in)	FLANGE OD (in)	DIA. BOLT CIRCLE (in)	NO. OF BOLT HOLES	DIA. OF BOLT HOLES (in)	AXIAL COMPRESSION (in)	AXIAL EXTENSION (in)	LATERAL DEFLECTION (in)	RATED WORKING PRESSURE (psi)	VACUUM RATING (IN Hg.)
1	4	10	9	7 1/2	8	3/4	4	2 1/4	2 1/4	5	3

NOTES:

DWN	RCL	CHKD	DATE	12/16/25
-----	-----	------	------	----------

DWG No	RCL-251216-2
--------	--------------